

Links

General Purpose

■ Features: Selection can be made from Square or Round Type.

RoHS 10

Type		Material
Square	Round	
LACF	LACG	Steel for General Structure


25 / (6.3 / 1.6)

■ General Purpose

Part Number		L 5mm Increment	W Selectable	A	B	F	Unit Price	
Type	DH7						LACF	LACG
Square LACF	3	40~100	5 6 9	20	20	15		
	4							
	5							
	6							
	8							
	10							
Round LACG	12	50~100	5 6 9 12	25	25	18		
	13							
	14							
	15							
	16							
	18							
	20							
	25							
	25							

Ordering Example: Part Number - L - W
LACF12 - 120 - 16

Alterations: Part Number - L - W - (KC, SC)
LACF10 - 75 - 16 - KC

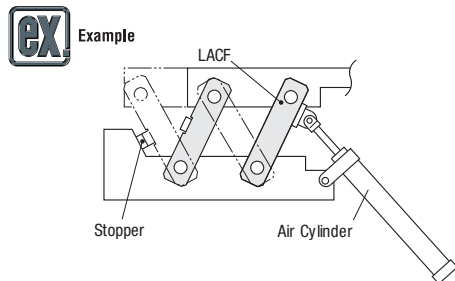

Alterations	30° Relief Machining	Groove, Tapping Alterations
Code	KC	SC
Spec.	Adds 30° relief machining ❗ Not applicable when L-(Fx2)<30. ⚡ Machining in the same direction as above drawing when specifying with SC alterations.	Adds a relief and a tap for mounting a stopper. ❗ Not applicable when L-(Fx2)<30.

Clamp Links

Standard Type for Rod End Bearings / 2 Clamps Type

■ Features: Select can be made from three types of materials.

RoHS 10

Type	Material	Surface Treatment	Accessory
CLKB	S45C	Black Oxide	Hex Socket Head Cap Screw (SUSM43)
CLKM	Equivalent	Electroless Nickel Plating	Hex Socket Head Cap Screw (SUS304)
CLKS	SUS304	-	-
CLKA	Aluminum Alloy	-	-

25 / (6.3 / 1.6)

⚡ DH7 tolerance is measured before slitting.

Part Number	Type	DH7	d Selection	L 1mm Increment	T	W	F	G	Included Screw M	d1	Unit Price				
											CLKB	CLKM	CLKS	CLKA	
CLKB CLKM CLKS CLKA			5 3 4 5 6 3 4 5 6 8 4 5 6 8 10 4 5 6 8 10 12 5 6 8 10 12 14 6 8 10 12 14 15 6 8 10 12 14 15 16 8 10 12 14 15 16 18 8 10 12 14 15 16 18 20 8 10 12 14 15 16 18 20 25 10 12 14 15 16 18 20 25	10~100 15~150 20~150 30~150 40~150	6 10 12 15	10 12 22 25	11 12 14 15 16 18 20 22 25	6 7 8 9 10 12 14 15 18	6 7 8 9 10 12 14 15 18	M4-10 M6-12 M6-15 M6-20 M6-25 M8-25 M8-30	4.5 6.6 6.6 9	Min. L - 90	L91-150	Min. L - 90	L91-150

■ 2 Clamps Type

RoHS 10


Type	Material	Surface Treatment	Accessory
CLKWB	S45C	Black Oxide	Hex Socket Head Cap Screw (SUSM43)
CLKWM	Equivalent	Electroless Nickel Plating	Hex Socket Head Cap Screw (SUS304)
CLKWS	SUS304	-	-

⚡ Tolerance DH7-d is the tolerance before slitting.

Part Number	Type	DH7	d Selection	L 1mm Increment	W	F	G	Included Screw M (2 pcs.)	d1	T	Unit Price				
											CLKWB	CLKWM	CLKWS	CLKWS	
CLKWB CLKWM CLKWS			5 3 4 5 6 3 4 5 6 8 4 5 6 8 10 4 5 6 8 10 12 5 6 8 10 12 14 6 8 10 12 14 15 6 8 10 12 14 15 16 8 10 12 14 15 16 18 8 10 12 14 15 16 18 20 8 10 12 14 15 16 18 20 25 10 12 14 15 16 18 20 25	10~100 15~150 20~150 30~150 40~150	10 12 15	10 12 22 25	11 12 14 15 16 18 20 22 25	6 7 8 9 10 12 14 15 18	6 7 8 9 10 12 14 15 18	M4-10 M6-12 M6-15 M6-20 M6-25 M8-25 M8-30	4.5 6.6 6.6 9	Min. L - 90	L91-150	Min. L - 90	L91-150

Ordering Example: Part Number - d - L
CLKB8 - 6 - 100
CLKWM20 - 16 - 100

Alterations: Part Number - d - L - (DKC, CKC, RC)
CLKB12 - 8 - 90 - DKC

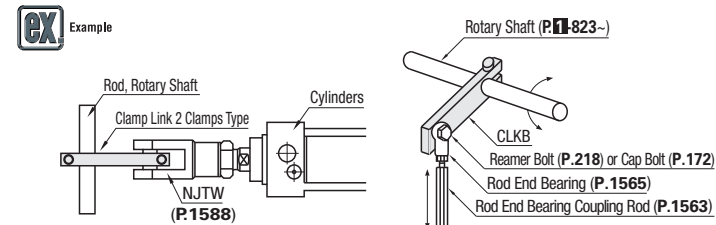

Alterations	Part of Reamer Machining (for and L Tolerance)	C Chamfering	Part of Slotted Hole
Code	DKC	CKC	RC
Spec.	Adds reamer machining (d1) on d part and changes L tolerance. ⚡ For 2 Clamps Type, change L tolerance only. Ordering Code: DKC	Adds chamfering on d side. Ordering Code: CKC	Changes d part to slotted hole. Z=1mm Increment Ordering Code: RC-Z5