


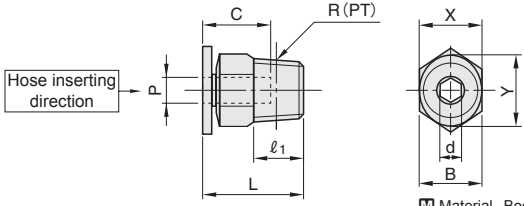
QUICK-FITTING JOINTS FOR MOLD COOLING

Green character items
now kept in stock.

 Stock Items in Thailand




C-M-PC (Straight hexagon shoulder joint)




Material Body: brass
Open ring: resin
※ Leakproof material is applied to the thread part.

Applicable Hose Outer Diameter*Inner Diameter	Hose Inserting Hole		Hexagon Socket Hole ○ d	L	B	l ₁	X	Y	R (PT)	Model		U/price
	Hole Diameter	Depth								Type	No.	
4M 2.5	4	15	○ 3	20.5	10	8	10	12	1/8	C-M-PC	4-01	
				19	19	10			1/4		4-02	
6M 4	6	15	○ 4	21	12	8	12	14	1/8		6-01	
				23	14	10			1/4		6-02	
				21	17	11			3/8		6-03	
8M 6	8	18	○ 5	26	14	8	14	16	1/8		8-01	
				25		10			1/4		8-02	
				22		11			3/8		8-03	
10M 8	10	22	○ 5	17	31	17	19	1/8	10-01			
			○ 6		31.5			10	1/4		10-02	
			○ 8		29			11	3/8		10-03	
12M10	12	22	○ 6	21	33.5	21	23	1/4	12-02			
			○ 8		31.1			11	3/8	12-03		

⚠ Please keep the shock pressure (transient pressure caused by shock waves) under the maximum operating pressure (300kPa) when it is in use.



C-M-POC (Straight hexagon socket joint)

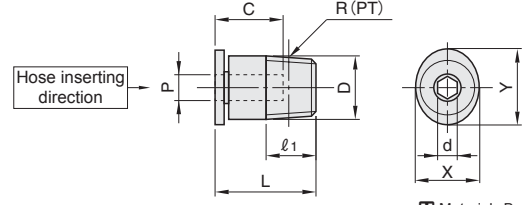

Material Body: brass
Open ring: resin
※ Leakproof material is applied to the thread part.

Applicable Hose Outer Diameter*Inner Diameter	Hose Inserting Hole		D	Hexagon Socket Hole ○ d	L	l ₁	X	Y	R (PT)	Model		U/price	
	Hole Diameter	Depth								Type	No.		
4M 2.5	4	15	10	○ 3	20.5	8	10	12	1/8	C-M-POC	4-01		
			12		21						10		1/4
6M 4	6	15	14	○ 4	23	10	12	14	1/4		6-02		
					26				8		1/8		8-01
					25				10		1/4		8-02
8M 6	8	18	17	○ 5	22	11	14	16	3/8		8-03		
					29				10		1/4		10-02
					31				11		3/8		10-03
10M 8	10	22	17	○ 6	29	11	17	19	1/4		12-02		
					31				11		3/8		12-03

⚠ Please keep the shock pressure (transient pressure caused by shock waves) under the maximum operating pressure (300kPa) when it is in use.



Order

Part Number

C-M-POC 6-02



Delivery



1

Day