



MISUMI
C-VALUE


Precision Ball Screws Standard Nut - Shaft Dia. 25; Lead 5, 10, 25 (C-BSSH) Accuracy Grade C5

For how to select Ball Screws, see P. 2223

Points of comparison between similar products

Load rating, axial clearance and nut dimensions of C-VALUE products are different from those of similar products. (For details, see P. 723 to P. 724.)
When opting for C-VALUE products, select them by comparing specifications of similar products.

Similar Product Pages P. 723, P. 724

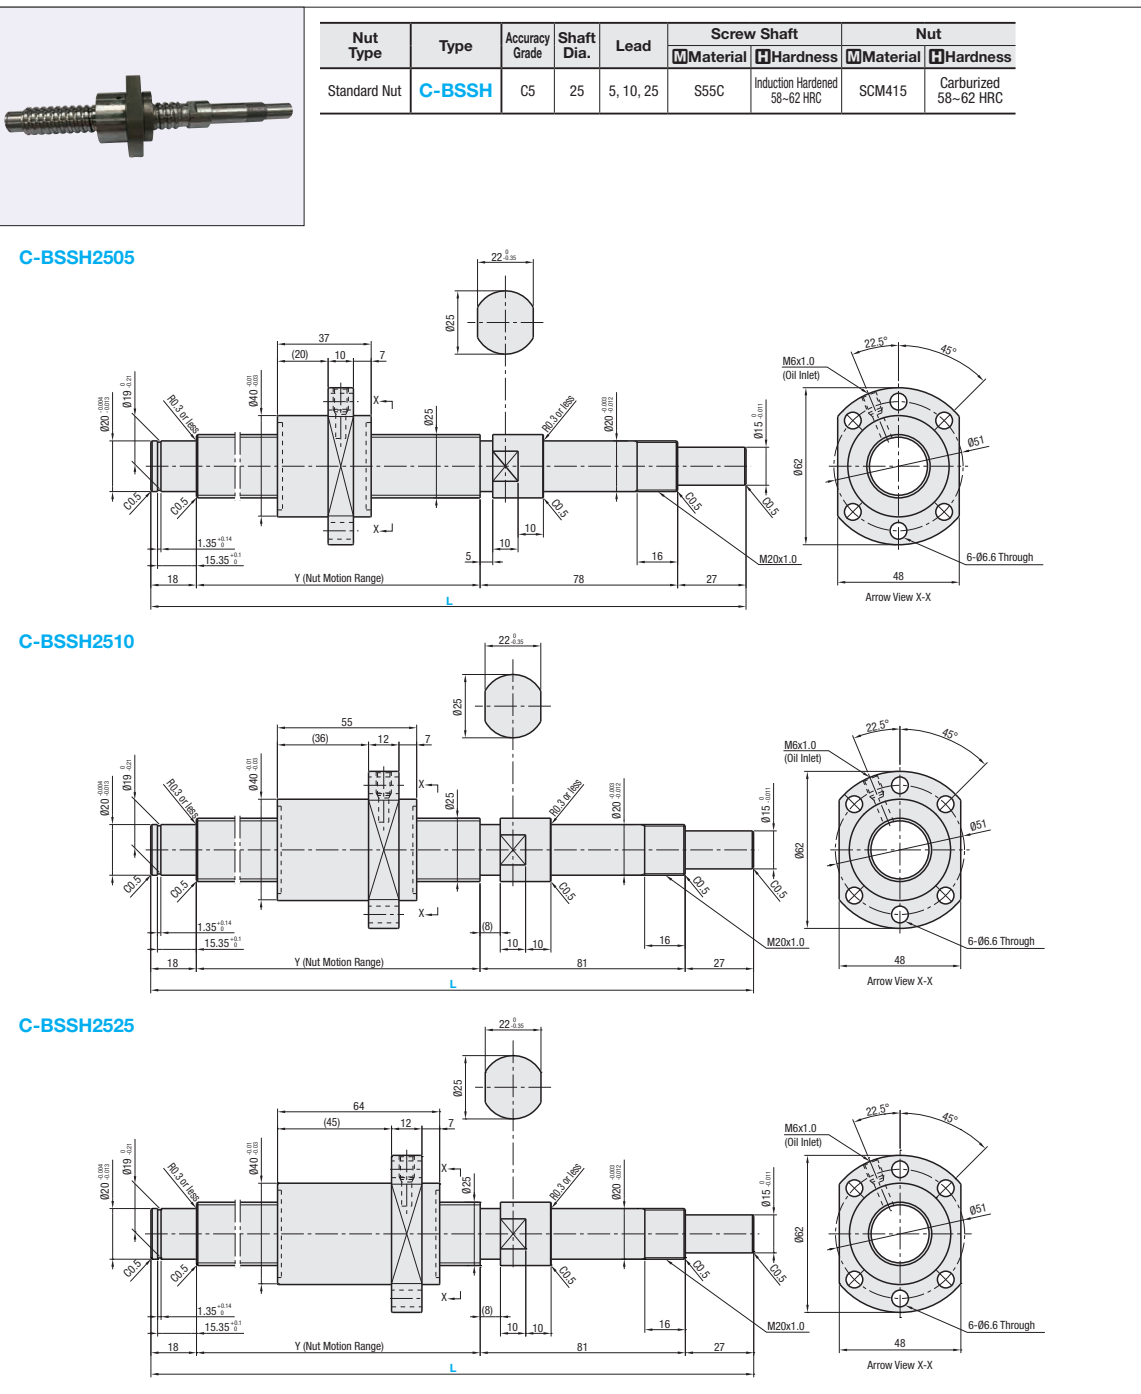

Nut Type	Accuracy Grade	Part Number			1 mm Increments	Y	Ball Dia.	Ball Center Dia.	Screw Root Dia.	Number of Circuits	Basic Load Rating		Axial Clearance	Preload Torque N-cm	Twisting Direction	
		Type	Screw Shaft O.D.	Lead	L						C (Dynamic) kN	Co (Static) kN				
Standard Nut	C5	C-BSSH	25	05	300~995	L- 123	3.175	26.08	(22.905)	3.8 turns, 1 row	7.8	18.2	0.015 or less	6.0 or less	Right	
				10	300~1500	L- 126						11.3				23.4
				25								1.8 turns, 1 row				7.3

kgf = N x 0.101972

Nut Type	Accuracy Grade	Part Number	JPY Unit Price: 1 to 4 pc(s).						
			L300~400	L401~595	L596~600	L601~800	L801~1000	L1001~1200	L1201~1500
Standard Nut	C5	C-BSSH2505							
		C-BSSH2510							
		C-BSSH2525							




Ordering Example

Part Number - L
C-BSSH2510 - 720

Notes

- Filled with lithium soap based grease (Alvania Grease S2 made by Showa Shell Sekiyu K.K.).
- For accuracy of Ball Screws, see P. 2223 and P. 2224.
- For details of Support Units, see P. 753 to P. 778.
- Cautions: Do not let the nuts overrun or remove the nuts from the screw shafts. It may cause the balls to fall out or damage the ball recirculation parts.
- Note that, when a ball screw shaft or ball screw nut is tilted, it may fall out due to its own weight.
- The collar included with the Support Unit product should be installed and tightened on the nut side of the ball screw.

[Do not let a nut overrun]



[Do not take a nut off]



Alterations

Part Number - L - (FC, MC...etc.)
C-BSSH2505 - 789 - RLC


Alterations	Code	Spec.
No Machining on Support Side Shaft End	NC	No machining added on the support side shaft end. Ordering Code NC
Ball Nut Orientation Reversed (Support Side) - (Fixed Side) Std. Revised	RLC	Changes the nut direction. Ordering Code RLC
No Retaining Ring Groove on Support Side Shaft End	RNC	No retaining ring groove is machined on the support side shaft end. Ordering Code RNC Combination with FC is not available.
Change Support Side Shaft End Machining	GC	Changes the machining on the support side. Q is selectable from 10, 12, 15 or 20. G = 1 mm Increments Ordering Code GC - Q10 - G20 5 ≤ G ≤ Q x 3 Y dimension is shortened. No Retaining Ring Groove Combination with FC is not available.
Change Support Side Shaft End Length	FC	Changes the length of the support side shaft end. FC = 1 mm Increments Ordering Code FC20 19 ≤ FC ≤ 60 Y dimension is shortened. Combination with GC is not available.

Alterations	Code	Spec.
Tapped Hole on Support Side Shaft End	MC	Adds a tapped hole on the support side shaft end. MC = 1 mm Increments Ordering Code MC40 M8 x 1.25 20 Y dimension is shortened. 28 ≤ MC ≤ 60
Keyway on Fixed Side Shaft End Detailed Keyway Dimensions P. 684	KC	Adds a keyway on the fixed side shaft end. KC = 1 mm Increments Ordering Code KC20 5 ≤ KC ≤ 26
Keyway on Fixed Side Shaft End	KLC	Adds a keyway at a customer specified area on the fixed side shaft end. (Keyway dim. is same as that of KC.) K, S = 1 mm Increments Ordering Code KLC - K20 - S3 6 ≤ K + S ≤ 26
Flat Machined on Fixed Side Shaft End	SC	Adds a flat on the fixed side shaft end. SC = 1 mm Increments Ordering Code SC20 5 ≤ SC ≤ 26
2 Flats Machined on Fixed Side Shaft End	SWC SGC	Adds two flats on the fixed side shaft end. SWC: 90° Position, SGC: 120° Position 1 mm Increments Ordering Code SWC20 5 ≤ SWC/SGC ≤ 26

Peripherals: Combination with the following parts is available.



Nut Brackets for C-Value Ball Screws are not available.



Combination with Support Units

Ball Screw Part Number			Recommended Support Unit			
Type	Screw Shaft O.D.	Lead	Part Number Type No.	Shape	Fixed Side	Support Side
C-BSSH	25	05 10 25	C-BRW	Round		
			C-BUR			
			C-BSW	Square		
			C-BUN			

Other than the part numbers shown above, a rich variety of Support Units are also available. (P. 761~P. 778)