
MAGNET FIXED TYPE SCATTER GUARD

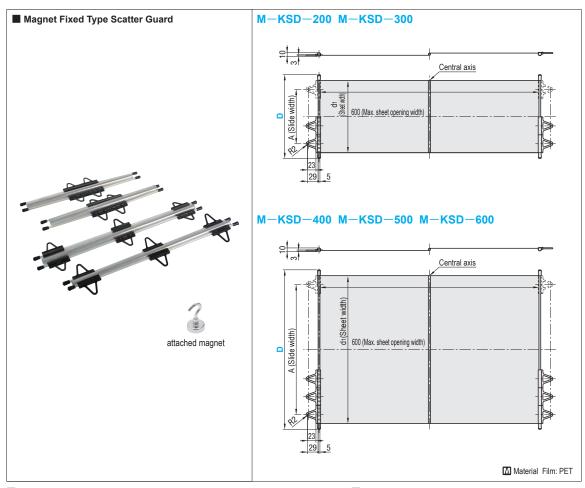


■ Magnet Fixed Type Scatter Guard


Α	d1	No. of magnet (pcs)	Part Number		Unit Price
			Туре	D	1~3 pcs
149	198	8	M-KSD	200	
280	295			300	ţį
380	395	12		400	ota
480	495			500	ð
580	595			600	

■ Magnet (Separate)

Material	Part Numb	Unit Price	
wateriai	Type	Quantity (pcs)	1~3 pcs
No a desertiona	M-KSDM	8	Quotation
Neodymium		12	















■ Application

- · Attach four magnets to both the fixed & movable sides of the molds when molding stop.
- To complete the installation, attach the scatter guard to the hook of the magnet.

■ Features

- Prevents molded parts from scattering.
- The transparent film allows one to check the molded parts.
- · As it is a magnetic fixed type, it is easy to make adjustment or relocate or open and close it.